



LT3 Illuminated Signal Indicators







SPECIFICATIONS


REVERSE VOLTAGE: 5V


REVERSE CURRENT(-Vr=5V)(for Red & Yellow & BLUE): 10 $\,\mu$ A

REVERSE CURRENT(VR = 5V)(for Green): 10 μ A OPERATING TEMPERATURE RANGE: -40°C ~ 85°C STORAGE TEMPERATURE RANGE: -40°C ~ 85°C


LEAD SOLDERING TEMPERATURE: 260°C for 3 Seconds








PC MOUNTING



HOW TO ORDER

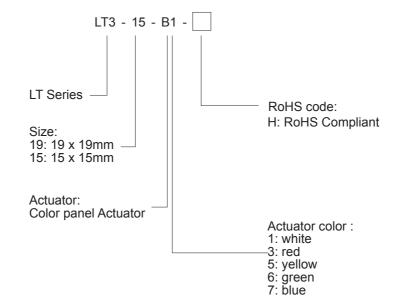

F-01 F-02