



SPECIFICATIONS

CONTACT RATING: 100mA, 42VAC/DC
MECHANICAL LIFE: 1,000,000 cycles
CONTACT RESISTANCE: 100mΩ max.(initial)
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,500VAC
OPERATING TEMPERATURE: -25℃ to +70℃

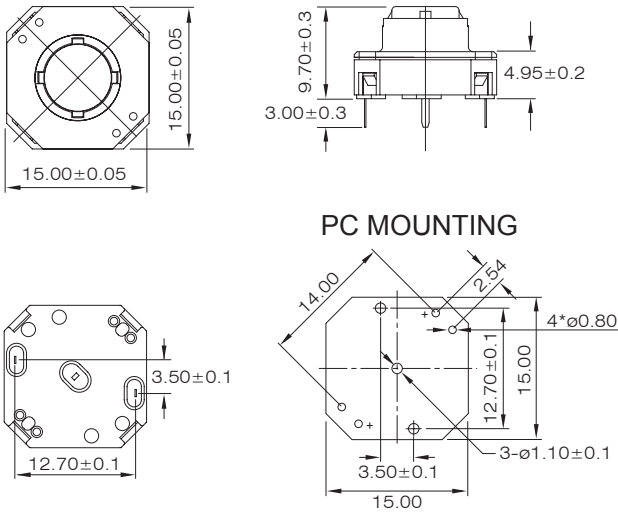

LT4-15-1

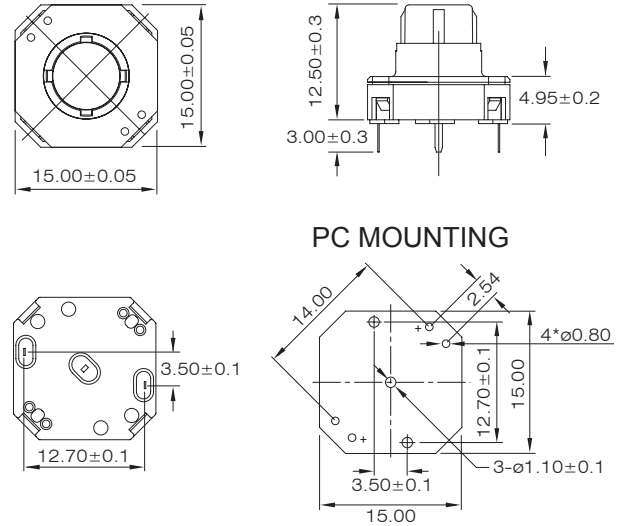

LT4-15-2

HOW TO ORDER

LT4 - 15 - HT - - - - -

LT4 Series

size:

19: 19 x 19mm
15: 15 x 15mm

HT Material

HT = High Temperature

Height:

1: 9.7mm
2: 12.5mm

LED quantity:

0: no LED
1: one LED
2: two LED

LED Cplor:

1: white
3: red
5: yellow
6: green
7: blue

RoHS CODE:

H = RoHS Compliant

Another LED Color:

1: white
3: red
5: yellow
6: green
7: blue