


INSULATION RESISTANCE: 1,000 MΩ UNDER 500V
 DIELECTRIC STRENGTH: BETWEEN CONTACTS 1000V BETWEEN CONTACTS AND NEUTRAL POINT 2000V EFF. 50Hz
 TEMPERATURE OF USE: -30°C to +85°C
 MECHANICAL LIFE: SILVER 20000 OPERATIONS
 (GOLDEN BRASS 20000 OPERATION)
 BREAKING CAPACITY:
 SILVER CONTACTS: 1A 250V
 GOLD CONTACTS: 10mA 5V- 10mA 50MV
 INITIAL CONTACT-RESISTANCE: SILVER < 10 MΩ
 GOLD: 50 MΩ

How do you build the switches you need!!





Switches TYPE			Terminal Pitch		Contact		Epoxy seal		RoHS code
H251	SPDT	high actuator	A	2.54	Q	silver gold	(none)	none seal	H = RoHS Compliant
F251	SPDT	flush actuator	B	5.08	R	gold	3E	epoxy seal	
H502	DPDT	high actuator							
F502	DPDT	flush actuator							

SPDT





		Switching position			
Model No.	spacing				
H251A	2.54	ON	NONE	ON	
H251B	5.08	ON	NONE	ON	
Term. Comm.		2-3	open	2-1	

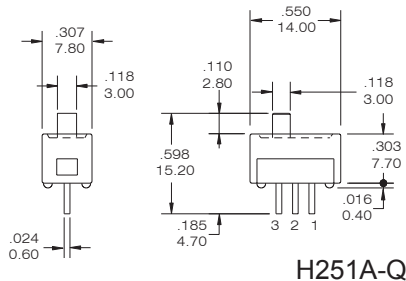


SPDT





		Switching position			
Model No.	spacing				
F251A	2.54	ON	NONE	ON	
F251B	5.08	ON	NONE	ON	
Term. Comm.		2-3	open	2-1	

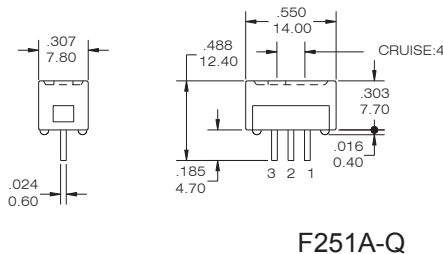


DPDT





		Switching position			
Model No.	spacing				
H502A	2.54	ON	NONE	ON	
H502B	5.08	ON	NONE	ON	
Term. Comm.		2-3,5-6	open	2-1,5-4	

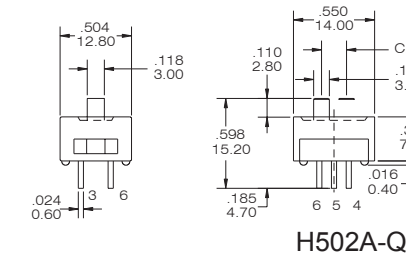

DPDT



		Switching position			
Model No.	spacing				
F502A	2.54	ON	NONE	ON	
F502B	5.08	ON	NONE	ON	
Term. Comm.		2-3,5-6	open	2-1,5-4	

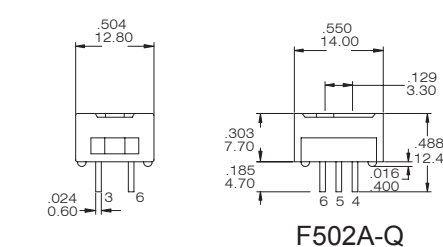

CONTACT MATERIAL OPTIONS

CODE	CONTACT MATERIAL	TERMINAL MATERIAL	RATING
Q	Silver plated	Silver plated	3 A @ 120V AC or 28 V DC; 1 A @ 250 VAC
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA MAX @ 20 V AC or DC MAX