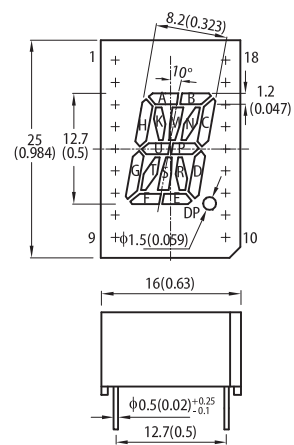
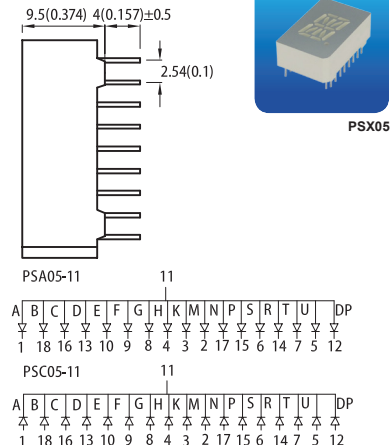
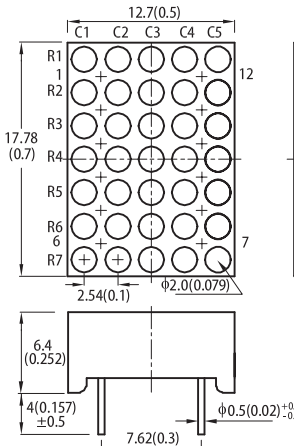
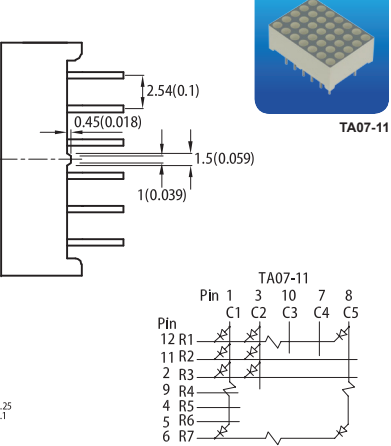




ALPHANUMERIC THROUGH-HOLE DISPLAY

Part Number		Material	λ D (nm)	Iv (ucd) @10mA		Dimensions
Common Anode	Common Cathode			Min.	Typ.	
PSA05-11SURKWA	PSC05-11SURKWA	AlGaInP	630	14000	31000	0.5 inch (12.7mm), Gray Face, White Segment  

DOT MATRIX

Part Number		Material	λ D (nm)	Iv (ucd) @10mA		Dimensions
Column Anode	Column Cathode			Min.	Typ.	
TA07-11SEKWA	/	AlGaInP	605	21000	42000	0.7 inch (18mm), 5x7, Gray Face, White Dot  
TA07-11SURKWA	/	AlGaInP	630	14000	24000	
TA07-11CGKWA	/	AlGaInP	570	5600	12000	

BAR GRAPH ARRAY

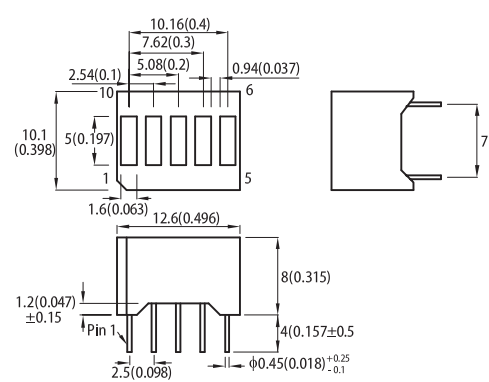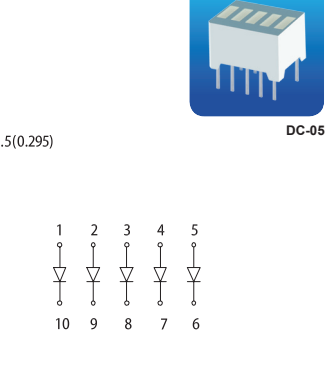Part Number	Material	λ D (nm)	Iv (ucd) @10mA		Dimensions
			Min.	Typ.	
DC-05YWA	GaAsP/GaP	588	900	2400	5 Segments, Bar Graph Array, Gray Face, White Segment  
DC-05GWA	GaP	568	1400	4000	

- NOTES:
1. All dimensions are in millimeters(inches).
 2. Tolerance is $\pm 0.25\text{mm}(0.01\text{'})$ unless otherwise noted.
 3. Luminous intensity value is traceable to CIE127-2007 standards.