


PLCC-Sockel • Socles PLCC



Serie 540

R = 2.54mm

Kontakt • **contact** Material • **matériau** Phosphor Bronze
 Oberfläche • **surface** Verzinkt • **étamé**
 Isolierkörper • **corps isolant** Glass filled thermoplastic (UL 94V-0)
 Betriebstemperatur • **température de service** -55°C...+125°C (SMD)
 -40°C...+105°C (THT)

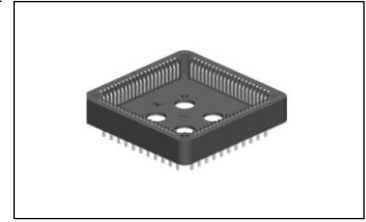

Bestellcode • Code de commande

540-88-032-17-400-P

Polzahl	20 (SMD)	28	32	44	52	68	84
---------	-----------------	-----------	-----------	-----------	-----------	-----------	-----------

Version	17-400								24-000-2							
	SMD								THT							
	<p>Optional (Add "-2" to part number)</p>															
	Pol.	A1	A2	B1	B2	C1	C2	D	E	Pol.	A	B	C	D	E	F
	20	14,86	14,86	7,02	7,02	9,20	9,20	4,60	16,00	28	18,09	18,09	7,62	7,62	12,90	12,90
	28	17,34	17,34	9,50	9,50	11,76	11,76	4,60	19,70	32	18,04	20,60	7,62	10,16	12,90	15,40
	32	16,95	19,50	9,40	11,90	11,60	14,20	3,80	22,00	44	23,10	23,10	12,70	12,70	18,00	18,00
	44	22,42	22,42	14,50	14,50	16,70	16,70	4,60	27,00	52	25,70	25,70	15,24	15,24	20,50	20,50
	52	25,40	25,40	17,24	17,24	19,46	19,46	4,60	30,80	68	30,80	30,80	20,32	20,32	25,75	25,75
	68	30,54	30,54	22,26	22,26	24,40	24,40	4,60	37,65	84	35,95	35,95	25,40	25,40	30,90	30,90
	84	35,56	35,56	27,34	27,34	29,58	29,58	4,60	45,10							

Option	P	
	standard	mit Positioniernocken (nur SMD) • avec tige de positionnement (seulement SMD)