


Pin	Dimensions (mm/inch)				Ordering Code
	"A"	"B"	"C"		
6	7,62/.300	7,62 .300	10,16 .400		PSO-306-H093-95
8	10,16/.400			PSO-308-H093-95	
10	12,70/.500			PSO-310-H093-95	
14	17,78/.700			PSO-314-H093-95	
16	20,32/.800			PSO-316-H093-95	
18	22,86/.900			PSO-318-H093-95	
20	25,40/1.000	15,24 .600	17,78 .700		PSO-320-H093-95
24	30,48/1.200			PSO-624-H093-95	
28	35,56/1.400			PSO-628-H093-95	
32	40,64/1.600			PSO-632-H093-95	
36	45,72/1.800			PSO-636-H093-95	
40	50,80/2.000			PSO-640-H093-95	
48	60,96/2.400			PSO-648-H093-95	

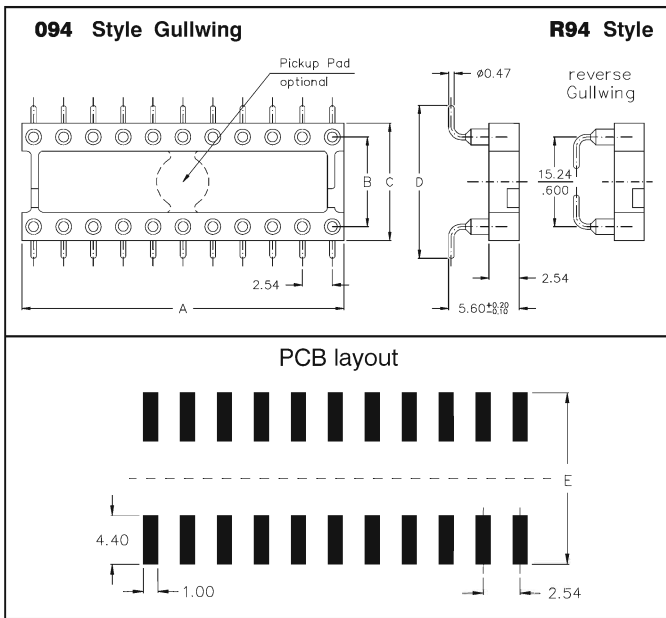

Pin	Dimensions (mm/inch)					Ordering Code
	"A"	"B"	"C"	"D"	"E" 094 Style	
10	12,70/.500	5,08 .200	7,62 .300	10,46 .412		PSO-210-H094-95
6	7,62/.300	7,62 .300	10,16 .400	13,00 .512	15,00 .590	PSO-306-H094-95
8	10,16/.400					PSO-308-H094-95
10	12,70/.500					PSO-310-H094-95
14	17,78/.700					PSO-314-H094-95
16	20,32/.800					PSO-316-H094-95
18	22,86/.900					PSO-318-H094-95
20	25,40/1.000					PSO-320-H094-95
				"E" 094 Style	"E" R 94 Style	
24	30,48/1.20	15,24 .600	17,78 .700	20,70 .815	22,70 .894	PSO-624-Hxxx-95
28	35,56/1.40					PSO-628-Hxxx-95
32	40,64/1.60					PSO-632-Hxxx-95
40	50,80/2.00					PSO-640-Hxxx-95

<p>Body types</p> <p>Standard = Open frame (PSO Series)</p> <p>Optional = Closed frame (PSC Series)</p>	<p>Insulator</p> <p>high-temp plastic UL 94 V-0 (RoHS compliant)</p> <p>For further technical data refer to page 49</p>	<p>Temperature</p> <p>Operating temp. - 55 °C to +125 °C</p> <p>Processing temp. +250°C ±0/-5°C for 20~40sec.</p>
--	--	--

How to order

PSO - x x x - H x x x - 95 (/ P)

if with Pickup Pad
only 28- & 32-pin
-others on request-

Series

PSO = open frame

PSC = closed frame

please contact sales office for more details

DIP spacing

in inch

see table, Dim "B"

Example:
3 for ".300"

Nbr of contacts

see table

Example:
06 for 6 Pin

Terminal styles

093 = straight

094 = gullwing

R94 = reverse gullwing

933 = floating on request

Plating

- 95 = tin/gold (tin leadfree)

others on request